


## M5 Quick Start Guide

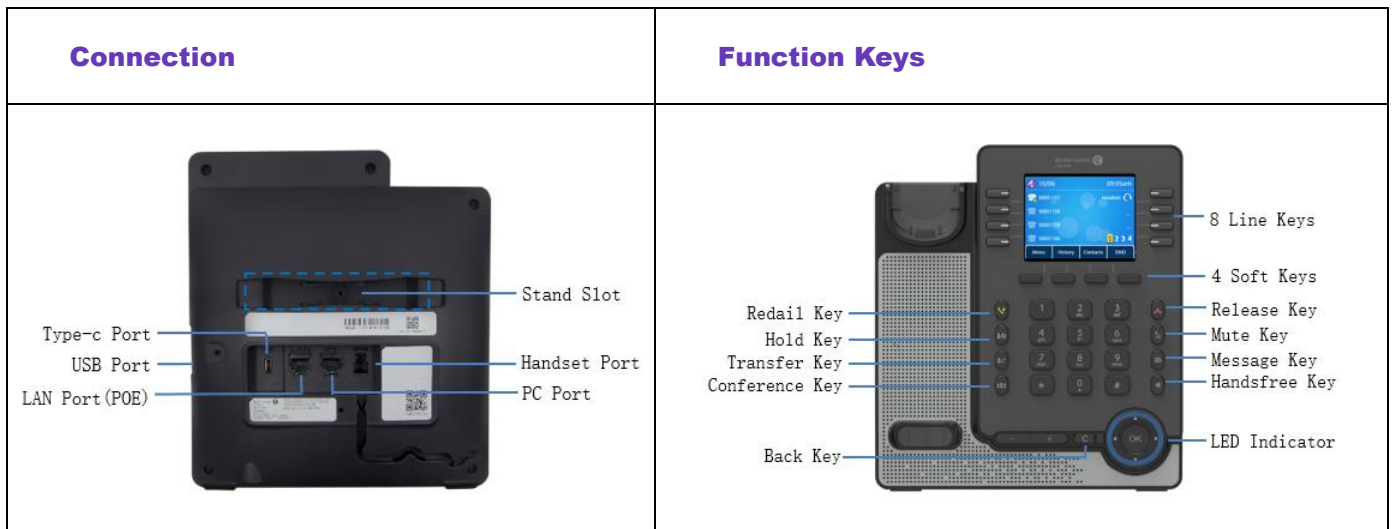

**Change Language:** English by default. Phone UI change path: Menu --> Basic Setting --> Language.

### 1. Configuring network

Dynamic mode by default. Phone UI change path: Menu --> Advanced Setting (default password 123456) --> Network --> IP Config --> IPv4 settings --> IPv4 Mode.


### 2. Configuring account

Users can configure account via phone UI or WEB UI. WEB UI example.

**Step 1:** Pressing "OK" key to view the IP address

**Step 2:** Entering https://IP address on the browser. Login with "admin" and password "123456"

**Step 3:** Configuring account as below

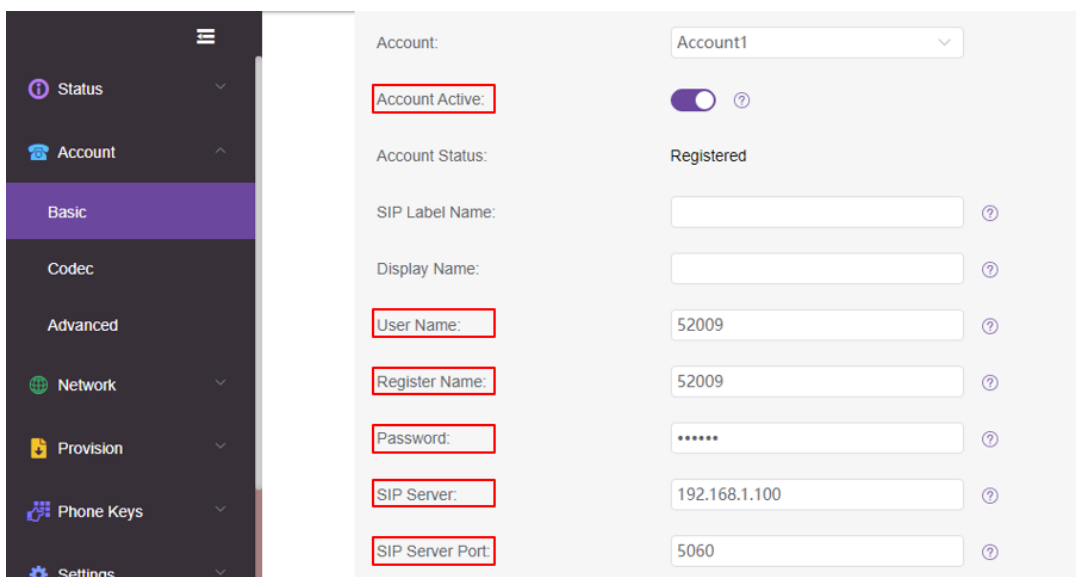

Account: Account1

Account Active:

Account Status: Registered

SIP Label Name:

Display Name:

User Name: 52009

Register Name: 52009

Password: .....

SIP Server: 192.168.1.100

SIP Server Port: 5060

Note: Marked items are mandatory. Please contact service provider for detail.

**Step 4:** Account status shows "Registered" when the SIP account is registered successfully.